

RETIGO

Freedom to work everywhere!


TANKBASE *by* **Timmer**



Construction details


Fresh water tank (29l)

- with lid and splash protection
- removable
- suited for dish washers

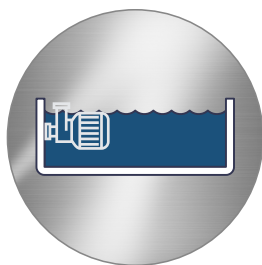



Drawer (optional)

- Space for accessories
- can be used as work surface
- with softclose

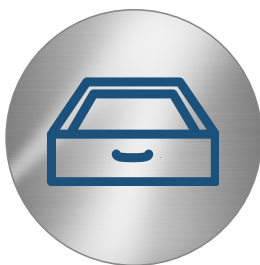


Service access from the front to

- Brita water treatment
- Pump
- Pressure tank

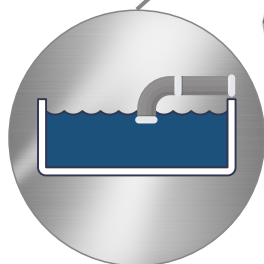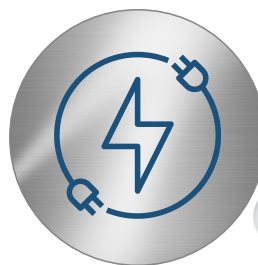

Waste water tank (30l)

- 2 tanks, removable with lid
- suited for dish washers
- with fat separation

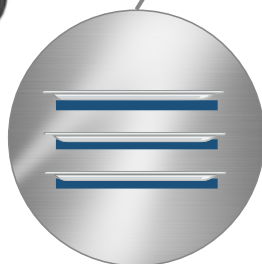

Crosswise GN racks (optional)

- 7 racks
- removable
- hygienic standard H1



Robust wheels (optional)

- adjustable height
- with breaks
- hygienic standard

Use cases of the TankBase



CHALLENGE

You don't have the option to install a water connection for your combi steamer, need to take your combi steamer with you regularly to events, or simply want to stay mobile and flexible?



SOLUTION

With our mobile tank solution as a base stand, you have all the flexibility you need. Simply plug in the power supply, fill the water tank, and you're ready to start cooking.



**Plug &
Play**



**Absolutely
independent**



**Maximum
Flexibility**



PERFECTLY SUITED FOR

Catering

1

Are you a caterer looking to take your combi steamer with you to events? Here is your solution!

Event rental service

2

Are you a rental provider for commercial kitchen equipment? With this solution, you can offer maximum flexibility.

Customers without installation options

3

Your facility does not allow for water supply and drainage installations? With this solution, you can now operate a combi steamer as well.



WITH ONE TANK LOAD

- at least **4 full loads of 6 kg** (dry product) **rice can be steamed**, or
- at least **2 full loads of 16 kg potatoes can be cooked**, or
- at least **8 hours (in the 611) or 6 hours (in the 1011) can be regenerated** in combi mode, or
- a **complete intensive cleaning cycle** can be carried out.

TECHNICAL DATA

Sizes and weight*

TB0623 : 750 x 755 x 950 mm | 123 kg

TB0611 : 950 x 755 x 950 mm | 132 kg

TB1011 : 950 x 755 x 690 mm | 110 kg

Volume

Fresh water tank: 29 Liter

Drain tank: 30 Liter

inkl. water treatment (Brita)

Connection

230 V / 50 Hz **via combioven****

no additional electrical connection required

*weight refers to the basic equipment


**combioven electrical connection: 623/ 611: 400V / 16A , 1011: 400V / 32 A

Optional accessories

- Upper compartment as a drawer / storage surface for 623 / 611
- Upper compartment with lockable drawer for 623, 611
- GN rack support rails for lower compartment for 623, 611, 1011
- Intermediate shelf in the lower compartment for 611, 1011
- Version on hygienic wheels for 623, 611, 1011
- Version without tank system – with storage space (drawers)
- With Vision Vent (condensation hood)
- Transport locking device on the combi steamer
- "Plug & Play" switch-over between fixed water supply/drain connection and mobile version
- cover panel to cover the spacing between combi oven and tank base



upper compartment
only TB0623 & TB0611

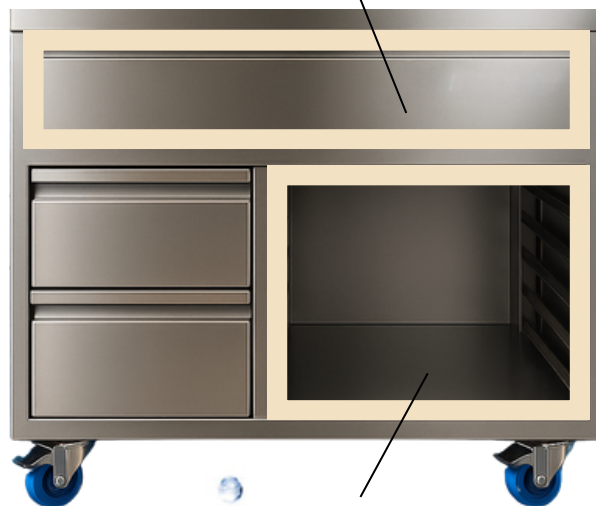

lower
compartment

RETIGO

RETIGO s.r.o.

Láň 2310

CZ-756 61 Rožnov pod Radhoštěm

Tel.: +420 571 665 511

E-mail: info@retigo.cz